

INTRODUCING THE NEXT GENERATION



VTX LED HIGHBAY GEN II

Introducing the next generation of PIERLITE VTX LED Highbay. This robust and durable Australian Designed highbay is the energy efficient LED solution to replace your metal halide or induction lighting.

VTX LED HIGHBAY GEN II

This robust and durable Australian Designed highbay is the energy efficient LED solution to replace you metal halide or induction lighting.

FEATURES

- Efficacy of up to 172lm/W (90W)
- High Light Output of up to 26,200 Lumens
- 54,000 hours average lifetime L90 @ 50°C
- Available in 4000K or 5000K
- IP66 rating
- IK06 rated for standard unit and polycarbonate lens upgrade available to IK10 (sold separately)
- DALI Dimming available
- 7 year warranty on fixed output and 5 years for DALI option
- Operating temperature -35°C to 50°C

BENEFITS




- A locally designed, high efficiency LED solution designed to replace conventional light sources with solid return on investment
- High efficacy of 172lm/W (90W) in order to maximize energy savings over the warranted lifetime.
- Lightweight construction for easier installation
- Suitable for both indoor and outdoor, as well as cold store and freezer applications.

LUMINAIRE CONSTRUCTION

- Housing manufactured from anti-corrosive passivated aluminium with an epoxy powder coat protective finish.
- Extreme temperature resistant silicone cable suitable for use in cold store and freezer applications.
- LED driver encapsulated within IP66 weather protection housing
- Mounting via a 304 Stainless steel eye bolt

APPLICATIONS

- Warehousing
- Cold Stores
- Distribution Centers
- Big Box Retail
- Workshops/Manufacturing
- Sports Facilities
- Showrooms

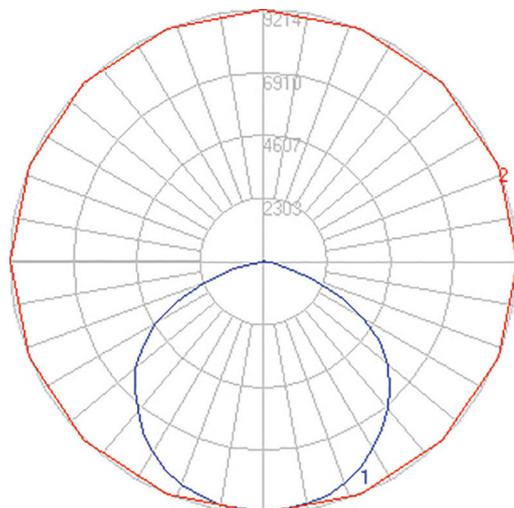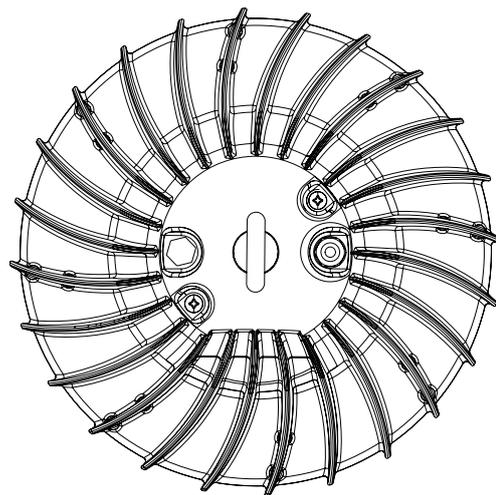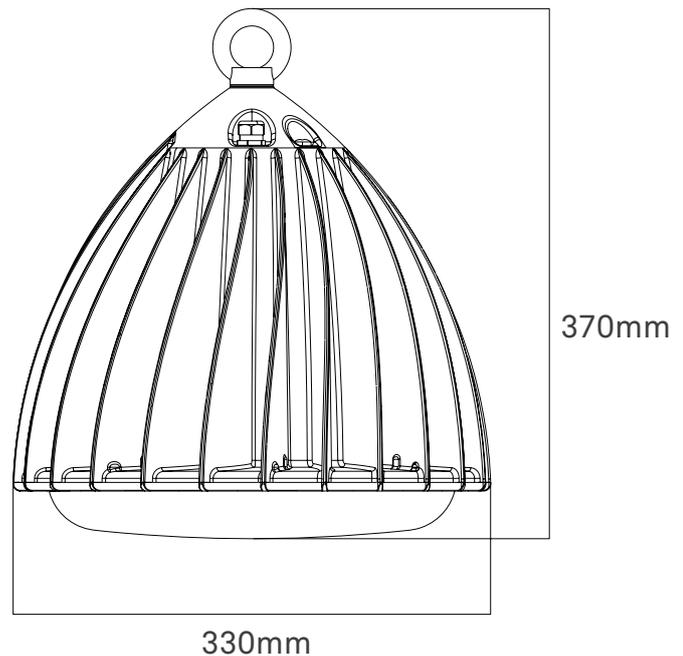

VTX LED HIGHBAY GEN II

DALI DIMMING OPTION

PRODUCT CODE	DESCRIPTION	WATTAGE	LUMEN	COLUR TEMP	DIMENSIONS (MM)	MASS (KG)
VTXC1655DAG2	VTX DALI LED Highbay Gen II	165W	25,200	5000K	330 x 370	6.9
VTXC1654DAG2	VTX DALI LED Highbay Gen II	165W	23,100	4000K	330 x 370	6.9

FIXED OUTPUT

PRODUCT CODE	DESCRIPTION	WATTAGE	LUMEN	COLUR TEMP	DIMENSIONS (MM)	MASS (KG)
VTXC0905G2	VTX LED Highbay Gen II	90W	15,500	5000K	330 x 370	6.9
VTXC1255G2	VTX LED Highbay Gen II	125W	20,650	5000K	330 x 370	6.9
VTXC1655G2	VTX LED Highbay Gen II	165W	26,200	5000K	330 x 370	6.9
VTXC0904G2	VTX LED Highbay Gen II	90W	14,200	4000K	330 x 370	6.9
VTXC1254G2	VTX LED Highbay Gen II	125W	18,900	4000K	330 x 370	6.9
VTXC1654G2	VTX LED Highbay Gen II	165W	24,000	4000K	330 x 370	6.9

OPTIONAL ACCESSORIES & REPLACEMENTS

PRODUCT CODE	DESCRIPTION
VTXCPLENS	VTX Clear Polycarbonate lens upgrading IK rating to IK10
VTXDPLENS	VTX Diffused Polycarbonate lens upgrading IK rating to IK10
VTXDPMMALENS	VTX Diffused replacement PMMA lens IK06
VTXCPMMALENS	VTX Clear PMMA replacement lens



*Rated LED design life where stated is based upon application of PIERLITE's operating and maintenance guidelines; see www.gerardlighting.com.au
 Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification.
 †Gerard Lighting Pty Ltd standard Terms and Conditions apply.



Issue: June 2018