

BLUETOOTH LED DOWNLIGHT

Product Code: DLP5BT/W



**CONNECTS DIRECTLY
TO YOUR SMART PHONE**

2700K ← W → 6500K

TUNABLE WHITE



Control downlights from any Apple iOS or Android OS device with Bluetooth



Recall and set groups and scenes to match your mood or function. Eg: turn off all downlights from one button



Easily adjust the colour temperature of lighting to suit the desired mood - from focused and alert to calm and relaxed



Based on the time of day you can easily set up schedules to set scenes or turn downlights ON/OFF automatically



On/Off/Dimming control from a wall plate – NO DIMMER REQUIRED!



Control downlights using voice commands through 'Amazon Echo' and 'Google Home'

IC-4 Compliant | IP65 from below | Aluminium construction | Easy to install clips | 90mm cut-out
Complete with 1.2m flex and plug | Lumen output: 800lm @ 6500K, 800lm @ 4000K, 750lm @ 2700K



BLUETOOTH LED DOWNLIGHT

Product Code: DLP5BT/W



CONNECTS DIRECTLY TO YOUR SMART PHONE

2700K — W — 6500K

TUNABLE WHITE

SPECIFICATIONS

Circuit wattage	9W
CRI	>80
CCT	2700K to 6500K (variable by user)
Lumen output	800lm @ 6500K, 800lm @ 4000K, 750lm @ 2700K
Downlight Dimensions	Overall diameter: 105mm, Depth (with cable): 52mm, Cut-out diameter: 90mm

SMART DEVICE REQUIREMENTS

- Apple smart phone or tablet running operating system iOS 10 or later
- Android smart phone or tablet running operating system 4.4.2 or later
- Bluetooth 4.0 or higher.

APPLICATIONS

- Residential
- Retail
- Small Offices / Meeting rooms

CONTROL FROM YOUR

Smart Phone




Connect to Avi-on App



Momentary switch for on/off and dimming – No Dimmer Required!*

As well as smart phone control, an off-the-shelf momentary (or 'bell press') switch* can be wired to a group of PIERLITE Bluetooth Downlights to provide on/off and dimming control from a wall plate.

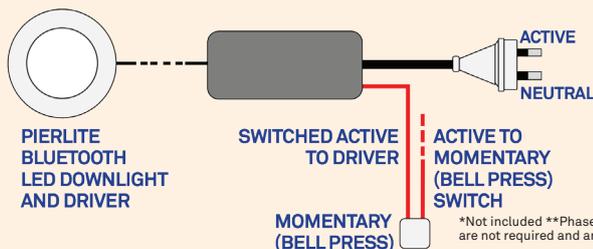

Install as part of the Diginet Sitara Lighting Control System for even more features

