

SLIMLINE AND ELEGANT PROFILE



PIERLITE STREAMLINE SURFACE

Streamline's sleek low profile luminaire is an elegant LED solution for surface mount applications, unlike traditional battens, this LED light fitting is a fully integrated LED light fitting with no tubes to replace.

PIERLITE STREAMLINE SURFACE

Streamline's sleek low profile luminaire is an elegant LED solution for surface mount applications, unlike traditional battens this LED light fitting is a fully integrated LED light fitting with no tubes to replace.

FEATURES

- Quick and easy to install
- Wide body allows for covering of conventional batten fixing points
- Powder coated white steel body
- Opalised diffuser for even light distribution
- 20mm knockout for conduit or cable glands
- Available in 3 sizes: 1500mm, 1200mm, 600mm
- 2 colour options: 4000K and 6500K
- 3 power outputs: 20W or 40W or 60W
- Non Dimmable
- Rated average design life 35,000 hours*
- 3 year warranty
- Unlike old battens this light fitting is fully integrated (light source and light fitting in one). There are no tubes to replace

BENEFITS



- Excellent and even light distribution
- Quick and easy to install
- Various size options provide more flexibility
- Designed to replace conventional battens
- Suitable for continuous fitting

SPECIFICATIONS

- Voltage: 240V
- Power Factor: 0.9
- Ingress Protection: IP20
- Ambient Temperature: Ta40°C
- Colour Rendering Index: CRI>80
- Beam distribution: 120°
- Available in 3 sizes & 2 colour
 - 20 Wattage: 600mm: 4000K, 6500K - 2000lm
 - 40 Wattage: 1200mm: 4000K, 6500K - 4500lm
 - 60 Wattage: 1500mm: 4000K, 6500K - 6500lm
- LLMF: 50,000hours L70 B50
- Non Dimmable

APPLICATIONS

Commercial, health, education retail and residential applications

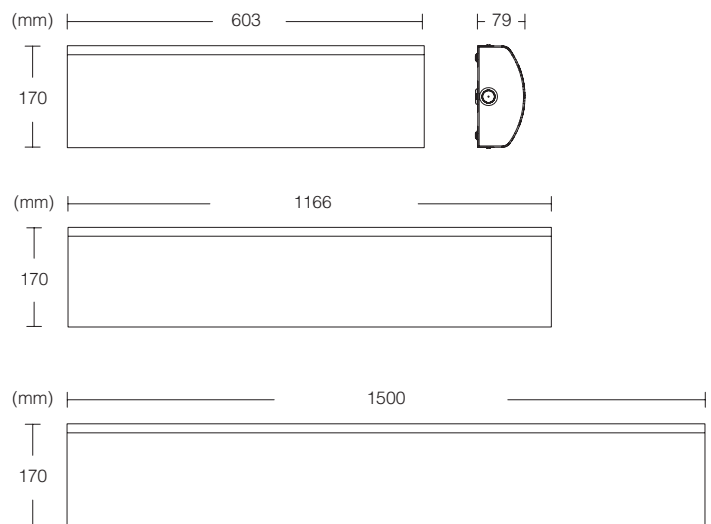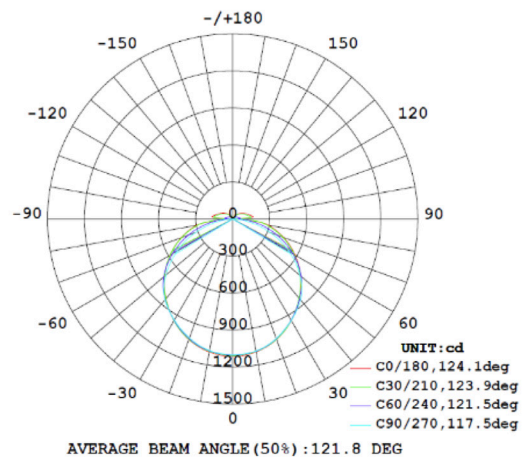

PRODUCT CODE	DESCRIPTION	WATTAGE	LUMEN	COLOUR TEMP	DIMMENSION (MM)	MASS (KG)	DIMMABLE
STMLED2/4	LED SURFACE 20W 600MM 4000K	20W	2000lm	4000K	L603xW170x H79	1.3	No
STMLED2/65	LED SURFACE 20W 600MM 6500K	20W	2000lm	6500K	L603xW170x H79	1.3	No
STMLED4/4	LED SURFACE 40W 1200MM 4000K	40W	4500lm	4000K	L1166x W170x H79	2.2	No
STMLED4/65	LED SURFACE 40W 1200MM 6500K	40W	4500lm	6500K	L1166x W170x H79	2.2	No
STMLED5/4	LED SURFACE 60W 1500MM 4000K	60W	6500lm	4000K	L1500x W170x H79	2.65	No
STMLED5/65	LED SURFACE 60W 1500MM 6500K	60W	6500lm	6500K	L1500x W170x H79	2.65	No



Due to continual product improvement, information is subject to change without notification. †Gerard Lighting Pty Ltd standard Terms and Conditions apply.
*Rated average design life is based on application of PIERLITE's product operating and maintenance guidelines; see www.gerardlighting.com.au.
Actual product life may vary dependent upon frequency of maintenance and product application.



PIERLITE is a registered trademark of Gerard Lighting Pty Ltd ©Copyright PIERLITE 2018
gerardlighting.com.au