

## Pierlite Maye LED Pendant

The new Pierlite Maye LED pendant is an aesthetically appealing suspended luminaire that has been designed to meet demanding Green Star requirements. Upwards and downwards lighting ensures soft and even light distribution and harmonious working environment.




# Pierlite Maye LED Pendant

Maye LED Pendant is ideal for use in offices with low UGR requirements. Its soft lit appearance and smooth contrast between downwards light and the ceiling creates pleasant working environment and visual comfort.

## Features

- Upwards and downwards lighting distribution
- Compact slim line design 30mm with driver built in the ceiling box
- Aluminium construction
- Low glare UGR<19
- Luminous Flux: upwards 980lm and downwards 1900lm
- Colour temp 4000K, CRI>80
- DALI Dimmable
- 50,000 hours rated average design life to L90\*

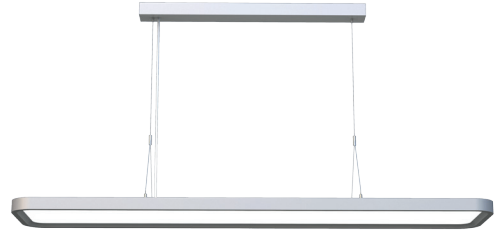

## Benefits


- Complies with Green Star v1 requirements
- Impressive light uniformity
- Architecturally appealing obtuse rectangle shape with smooth finishing

## Key Applications

Commercial applications, offices and other public working areas.

## Specifications

- LED: 4000K CCT, CRI >80,
- MacAdam 3 SDCM
- Wattage: 37W
- IP rating: IP20
- Power Factor: ≥0.95
- Ta 25°

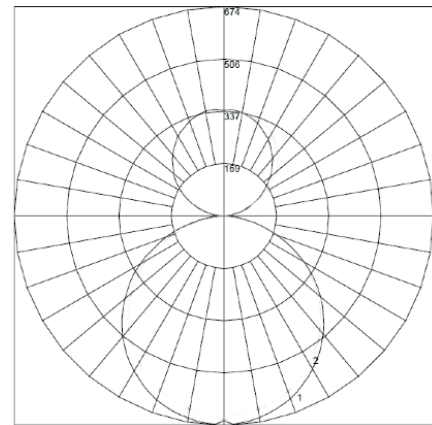

Product Code	Description	Wattage	Lumen	Colour Temp	Dimensions (mm)	Mass (Kg)
MAYE1234U	MAYE-Round Edges White Pendant 4000K DALI	37W	Upwards 980lm Downwards 1900lm	4000K	1200 x 260 x 30	6.37



\*Rated average design life is in accordance with IEC standards. Actual product life may vary dependent upon frequency of maintenance and product application.



Issue date November 2016