


PIERLITE Maxi Master LED Floodlight Gen II

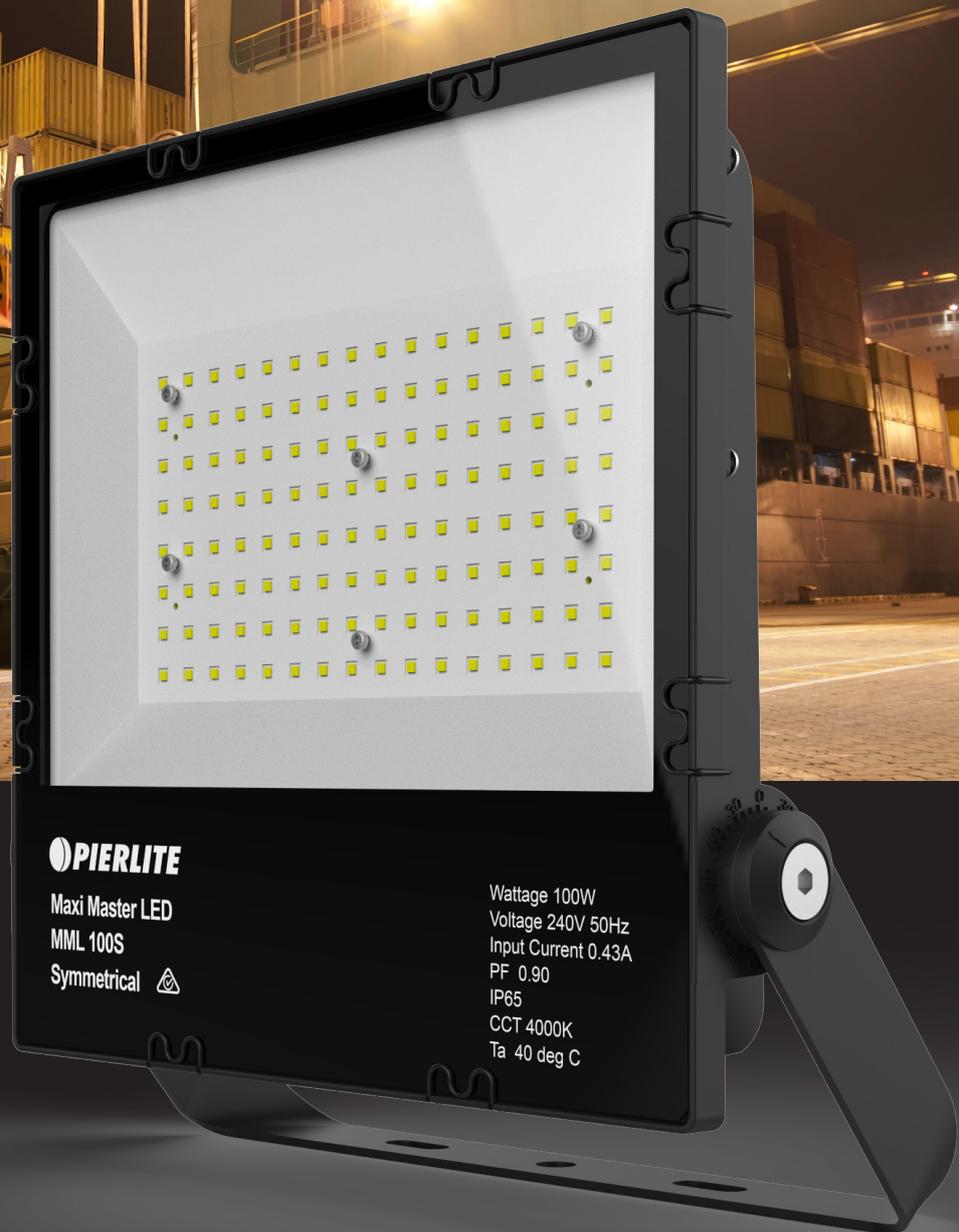

PIERLITE

Maxi Master LED

MML 100S

Symmetrical 

Wattage 100W
Voltage 240V 50Hz
Input Current 0.43A
PF 0.90
IP65
CCT 4000K
Ta 40 deg C

HIGH PERFORMING EXTERNAL LUMINAIRE



PIERLITE Maxi Master LED Floodlight GEN II

PIERLITE Maxi Master LED Floodlight GEN II Range is designed for high performance output and energy savings. This compact high performer is perfect for general illumination in light industrial, commercial and car park installations. Now offering asymmetrical distributions for lower glare and symmetrical options for general purpose floodlighting.

A range of wire guards accessories are available.



SLIMLINE DESIGN

Diecast aluminium body powder coated black with galvanised trunnion arm powder coated black.

MADE TOUGH

4mm tempered glass with optional wire guard accessories available.

VERSATILITY

Integrated aiming protractor on trunnion for easy aiming with Symmetrical & Asymmetrical distribution.



CAR PARKS



COMMERICAL



INDUSTRIAL

Features

- Diecast aluminium body powder coated black
- Galvanised trunnion arm powder coated black
- Integrated aiming protractor on trunnion for easy aiming
- Symmetrical & Asymmetrical distribution
- Optional accessories include wire guard
- Efficacy over 110lms/w
- 4mm tempered glass
- 1 meter flying lead
- 50,000hrs rated average design life* @ L70
- 5 year warranty

Benefits

- Energy efficient LED floodlight, lower running costs
- Easy installation with 1 metre flying lead and light weight
- Slimline compact design, suitable for a variety of applications
- High lumen output, fewer luminaires required
- Asymmetrical distribution option reduces glare

Specifications

- Wattage: Available in 50W, 100W, 200W and 300W versions
- Voltage: 240V
- Power Factor: >0.90
- Colour temperature: 4000K
- Colour Rendering Index: CRI 80
- Ingress protection: IP65
- Impact resistance: IK08
- Maximum operating temperature: Ta40°C
- Compliant to AS/NZS60598.1:2013 Luminaires – General requirements
- Non Dimmable

Key Applications

- General floodlighting
- Exterior car parks
- Light commercial and industrial areas
- Security lighting



MML 50S



Wire Guard





MML100A Front





MML100A Back

MML50S-50W

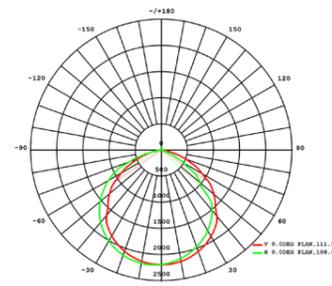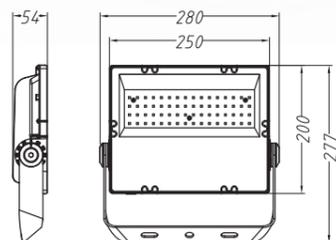


Symmetrical

MML100S/100A - 100W

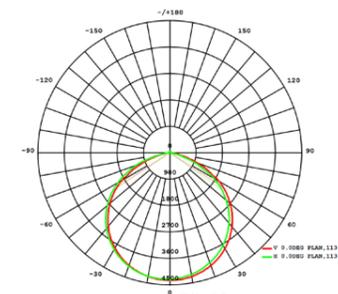
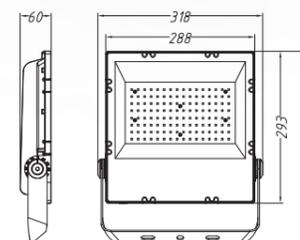


Symmetrical

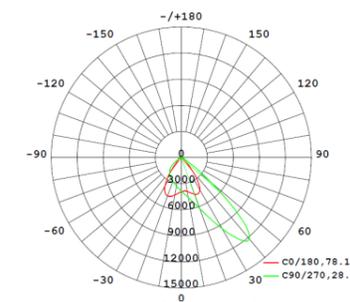


Asymmetrical

MML200S/200A - 200W

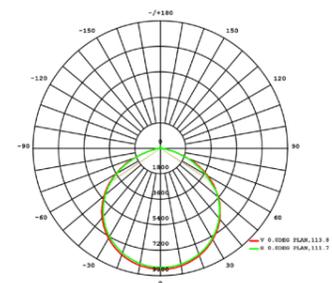
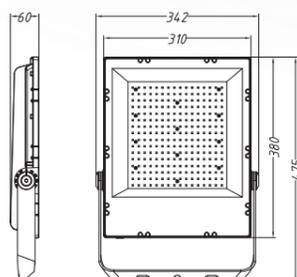


Symmetrical

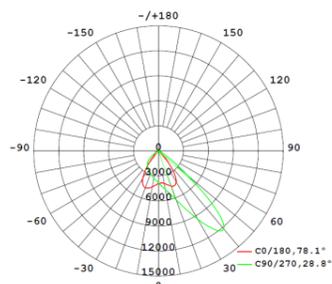


Asymmetrical

MML300S/300A - 300W

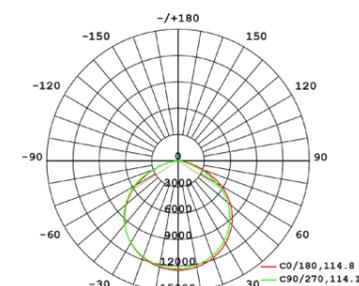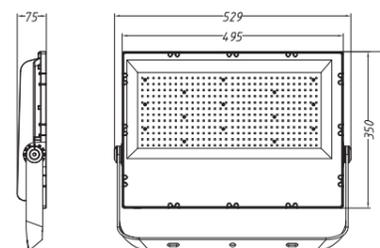

Symmetrical

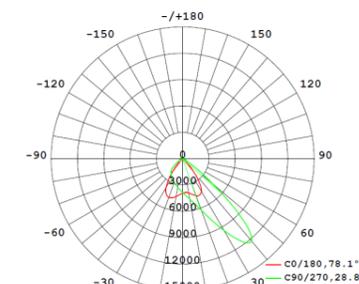

Asymmetrical

Maxi Master LED Floodlight Gen II - ASYMMETRICAL


Product Code	Description	Wattage	Lumen	Colour Temp	Dimensions (mm)	Mass (Kg)	Distribution
MML100A	100w Maxi Master Asym	100W	11000	4000K	295x318x60	4.0	Asymmetrical
MML200A	200w Maxi Master Asym	200W	22000	4000K	380x342x60	6.2	Asymmetrical
MML300A	300w Maxi Master Asym	300W	33000	4000K	350x529x75	9.5	Asymmetrical

Maxi Master LED Floodlight Gen II - SYMMETRICAL

Product Code	Description	Wattage	Lumen	Colour Temp	Dimensions (mm)	Mass (Kg)	Distribution
MML50S	50w Maxi Master Sym	50W	5250	4000K	200x280x54	2.0	Symmetrical
MML100S	100w Maxi Master Sym	100W	12000	4000K	293x318x60	4.0	Symmetrical
MML200S	200w Maxi Master Sym	200W	24000	4000K	380x342x60	6.2	Symmetrical
MML300S	300w Maxi Master Sym	300W	36000	4000K	350x529x75	9.5	Symmetrical

Maxi Master LED Floodlight Gen II - WIRE GUARD

Product Code	Description
MML50WG	50w Maxi Master Wire Guard
MML100WG	100w Maxi Master Wire Guard
MML200WG	200w Maxi Master Wire Guard
MML300WG	300w Maxi Master Wire Guard

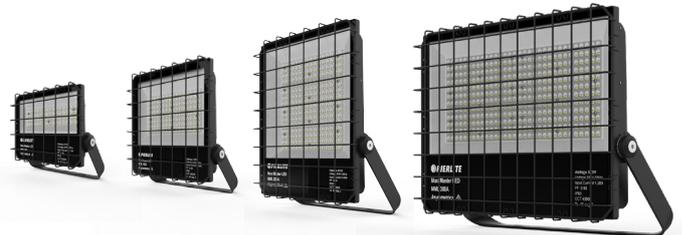

*Rated average design life where stated is based upon application of PIERLITE's operating and maintenance guidelines; see www.gerardlighting.com.au Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. †Gerard Lighting Pty Ltd standard Terms and Conditions apply.

National Support Office
1300 799 300