

GF Series Bulkhead

The GF Series LED Bulkhead offers a Zone rated solution for multipurpose application in various configurations. Available in 2 wattages, 3 photometric distributions, and 4 mounting options. The GF Series meets the arduous application requirements for the most demanding sites.

Ex d IIB T5 or T6 Gb;
Ex t IIIC T95° C or T80° C Db IP66
IECEX Certificate NO.: IECEX CQM 12.0033X

Built for use in:

- Petroleum industry
- Petrochemical industry
- Power generation industry
- Power transmission industry
- Drilling platform
- Oil tanks
- Workover platform
- Production platform
- Field tank
- Pumping station
- Transformer station
- Warehouse

ZONE 1

ZONE 21

IP 66

5

YEAR
WARRANTY




50,000 HOURS
RATED AVERAGE
DESIGN LIFE*

ta55

Features:

- OSRAM LED source offering high efficacy and lumen output
- Explosion proof aluminium alloy enclosure offering high anti- impact performance
- Installation loop has been designed with an anti-off set screw to ensure site safety
- Terminal compartment has been isolated from the LED source compartment to increase site safety

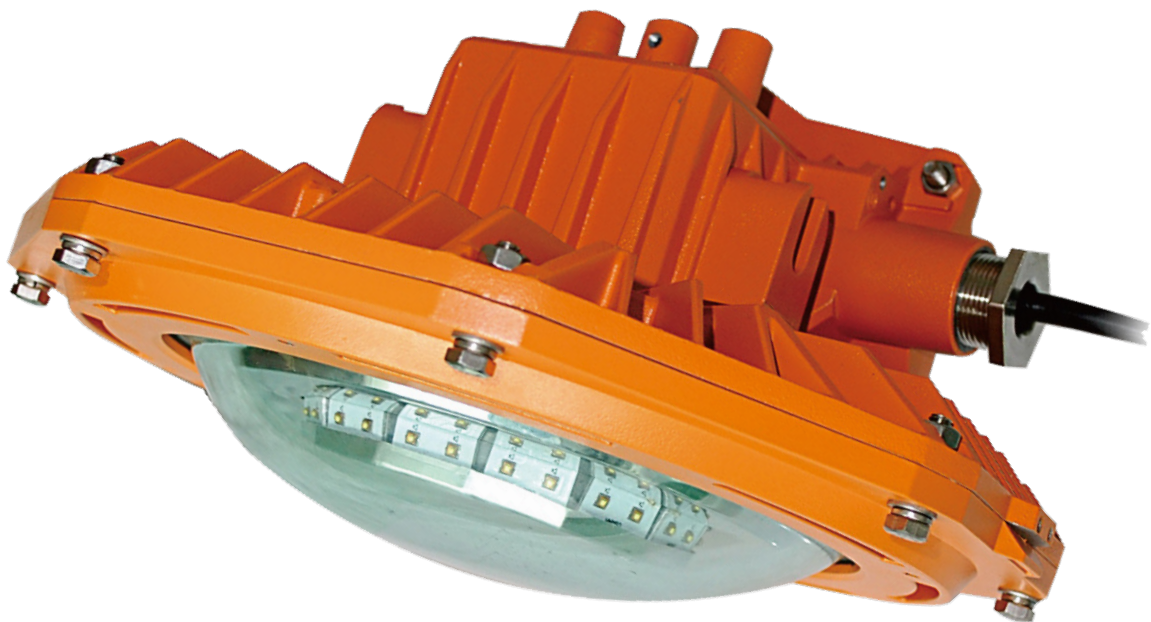

GF Series Bulkhead

Accessories



Bracket

KGF-CBRKT



Stanchion Bracket

KGF-SBRKT



Loop

KGF-LOOP



Guard


KGF-GUARD




Pipe Clamp

KGF-PC


Installation Options

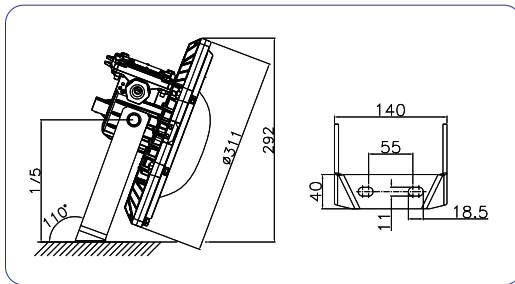


Stanchion Mount

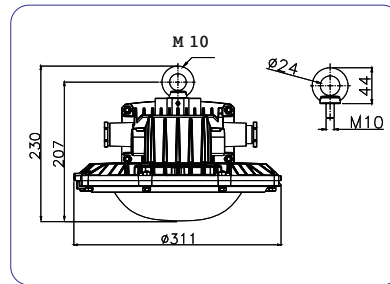

Pendant Mount

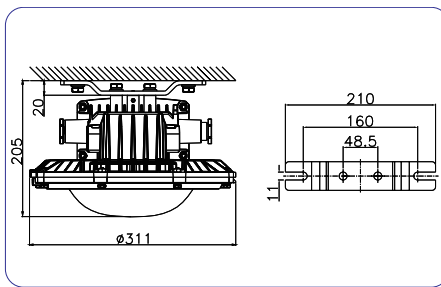


Ceiling Mount

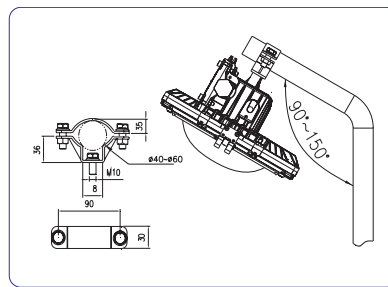


Pipe Clamp


Photometric Distribution



Wide Beam



Medium Beam



Narrow Beam