

JULUXLED2

The Julux LED2 and Julux LED2-MS have been designed to meet commercial spaces.

Specification

- Rated average life of 35,000 hours*, 6000K
- An energy efficient weather resistant IP65 system
- Low glare, polycarbonate opal prismatic diffuser
- Stylish high gloss black polycarbonate base
- Integral constant current driver
- Optional integral motion sensor
- The hidden sensor switches off the luminaire when there is no movement
- The sensor version has an adjustable time out period

Product Codes

Code	Version	Dim (mm)	Mass (kg)
JULUXLED2	9W LED 6K	245 x 125 x 120	0.8



Quick Specification


Pierlite opal prismatic polycarbonate, black base 9W IP65 bulkhead with or without integral motion sensor

Design Application

Interior or covered residential, commercial services, health care, apartments and retail design applications.

Performance


Dimensions

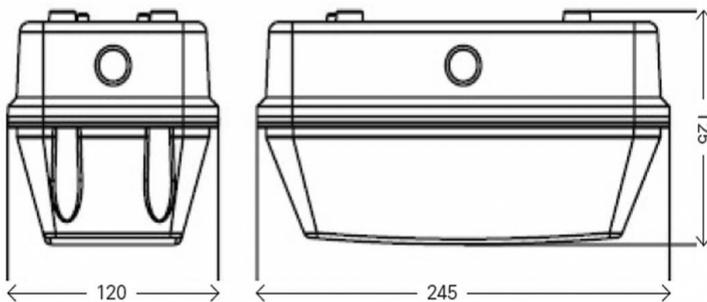

JULUXLED2 1xLED/760

Lamp lumens 1 x 660 lm

Polar intensity diagram

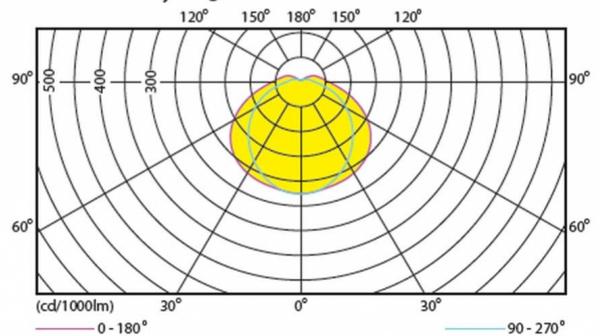

IP65



Max Dim (mm)
245 x 125 x 120

PDF Prepared: 07.02.2017 13:02pm, Last page update: Oct 2013

