



## JAX SERIES 4

### *Range Of LED Downlights*

JAX Downlight Series combines a unique blend of form and function by providing lighting designers with extremely versatile luminaires and the ultimate in efficient performance. With a range of sizes and wattages the entire family blends with each other for a seamless look and the sleek rebated bezel reduces glare.

# JAX SERIES 4

## Range of LED Downlights



### Features

- Constructed with a diecast bezel and drop forged heatsink
- Reflectors are anodised aluminium
- Reflector optics standard 40°
- Cree CXB 95+
- Available in 3000K & 4000K colour temperature
- Quick and Easy – installation
- Dimmable – refer driver platform for options
- 50,000 Hours (L70)
- One of a family of 4 trim sizes (JAX Series 1-4), 10-54 wattage options

### Applications

- Designed for retail, food preparation, facades

### Specifications

Colour Temp	3000K and 4000K
Lumen Output	See Chart
CRI	>95
Macadams Step	3 SDCM
Beam Distribution	Symmetric
Default Beam Angle	40°
Lumen Maintenance	L70 50,000hrs
Control	Remote
Dimensions	Ø226 x H:140mm
Cut Out	Ø215mm
Min Recessed Depth	170mm
Power Factor	0.9
Electrical Rating	Class III


# JAX SERIES 4

## Range of LED Downlights


### Technical Requirements

45/54W	Required Component			
	Driver		45W	54W
	DAT1HF17501	Non-Dim	1200mA	1400mA*
	DAT1HD17501	DALI		
	DAM60V14001	1-10V		
* = Factory Default				

Body selection	Description	Wattage	Lumens Initial	Lumens Exit	mA setting
JD2263141	JAX SERIES 4 54W 3K WHITE	45	4233	3919	1200
		54	4830	4471	1400
JD2264141	JAX SERIES 4 54W 4K WHITE	45	4374	4048	1200
		54	4990	4618	1400
JD2263143	JAX SERIES 4 54W 3K SILVER	45	4233	3919	1200
		54	4830	4471	1400
JD2264143	JAX SERIES 4 54W 4K SILVER	45	4374	4048	1200
		54	4990	4618	1400

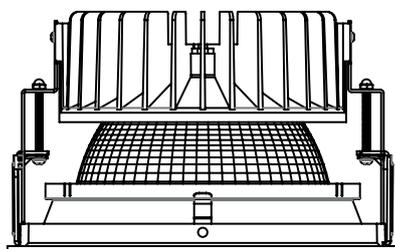

140mm



Ø226mm

Cut out Ø215mm

