

# SLIMLINE APPEARANCE ONE BOX SOLUTION



## **BLADE 2** LED EXIT LIGHT COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

A premium exit sign designed for applications where aesthetics are everything, from commercial office areas, hotels & apartments to shopping/cinema complexes.



# BLADE 2 LED EXIT LIGHT COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

Stylish, energy efficient LED exit luminaire where aesthetics is important.

## FEATURES

- Compliant to AS/NZS 2293
- Ceiling mount with an optional recessed kit
- Complete with replaceable Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery
- Optional black theatre version
- Optional IP65 KIT (Aqualock)
- Manual test
- Maintained emergency exit
- All in one solution including all pictogram inserts
- Also available in DALI version
- 24m viewing distance
- 3 year warranty including battery

## BENEFITS

- Long LED life of 50,000 hours L70 provides low maintenance costs
- One box solution with a fully integrated assembly makes for easier installation
- Replaceable Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery
- Flexible for ceiling or wall mounting

## SPECIFICATIONS

- Wattage: Maximum 4.6W
- Photometric Measurements: 30lm @ 0.9W
- Voltage: 240V
- Ingress Protection: IP20 rated and optional IP65 kit
- Maximum Ambient Temperature: Ta40°C
- LED Life: 50,000 hours L70
- Weight: 0.9kg
- Dimension: L368 x W55 x H225 (mm)
- Colour: White (Black option available)
- Battery Specification: LiFePO<sub>4</sub>, 1 cell 3.2V 1500 mAh rechargeable battery pack
- Classification:
  - LEDXM2P-L (Standard): C0/C180:D4 C90/C270:E3.2 (2HR)
  - LEDXM2PB-L (Theatre): C0/C180: E1.6 C90/C270:E2 (2HR)

## OPTIONAL ACCESSORIES

- LEDRB: White recessed kit
- AQUALOCK-W: IP65 kit
- SKITLED: Suspension Kits
- 99023330: Rod Suspension Kit 1600mm white
- EXCB: Cantilever Bracket Wall Mount Kit

## REPLACEMENT BATTERY

- BATPK1500/1L11: LiFePO<sub>4</sub> Battery, 1 Cell 3.2V 1500 mAh

## APPLICATIONS

Ideal for emergency lighting application where aesthetics is important - commercial buildings, hotels, retail, cinema complexes, apartments and hospitals.




LEDXM2P-L



LEDXM2P-L & LEDRB



AQUA LOCK-W (IP65) with LED Blade

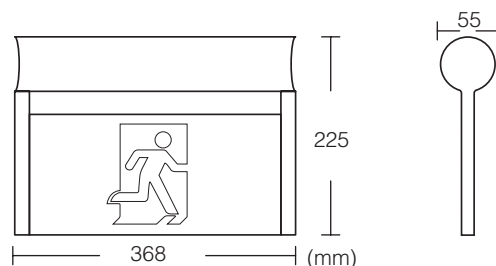

All pictogram inserts  
LEDXM2P-L (Standard)



All pictogram inserts  
LEDXM2PB-L (Theatre)

# BLADE 2 LED EXIT LIGHT

## COMPLETE WITH LITHIUM IRON PHOSPHATE BATTERY

### LEDXM2P-L (Standard): AS/NZS2293.1:2018 CLASSIFICATION TABLE

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLANE (M)	
	C0/C180	C90/C270
2.1	7.1	5.8
2.4	7.2	6.1
2.7	7.3	6.4



LEDXM2PB-L

### LEDXM2PB-L (Theatre): AS/NZS2293.1:2018 CLASSIFICATION TABLE

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLANE (M)	
	C0/C180	C90/C270
2.1	4.6	5
2.4	4.7	5.2
2.7	4.6	5.2

PRODUCT CODE	DESCRIPTION	WATTAGE	DIMENSION (MM)	MASS (KG)
LEDXM2P-L	Standard BLADE2	4.6W (Maximum)	L368 x W55 x H225	0.9
LEDXM2PB-L	Theatre/Black BLADE2	4.6W (Maximum)	L368 x W55 x H225	0.9

### ACCESSORIES

BATPK1500/1L11	LiFePO4 Battery, 1 Cell 3.2V 1500 mAh
AQUALOCK-W	IP65 Enclosure
LEDRB	Recessed Bracket (cut-out: 380x88mm)
SKITLED	Suspension Kit
99023330	Rod Suspension Kit 1600mm white
EXCB	Cantilever Bracket Wall Mount Kit

**240V**

**4.6W**  
MAXIMUM

**ta40**

**50,000 HOURS**  
RATED AVERAGE DESIGN LIFE\*

**3**  
YEAR WARRANTY†  
INCLUDING BATTERY

**IP20 RATED**

**24m**  
VIEWING DISTANCE



\*Rated LED design life where stated is based upon application of PIERLITE's operating and maintenance guidelines; see [www.gerardlighting.com.au](http://www.gerardlighting.com.au)  
Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. †Gerard Lighting Pty Ltd standard Terms and Conditions apply.

