



## JAX SERIES 3

### *Range Of LED Downlights*

JAX Downlight Series combines a unique blend of form and function by providing lighting designers with extremely versatile luminaires and the ultimate in efficient performance. With a range of sizes and wattages the entire family blends with each other for a seamless look and the sleek rebated bezel reduces glare.

# JAX SERIES 3

## Range of LED Downlights



### Features

- Constructed with a diecast bezel and drop forged heatsink
- Reflectors are anodised aluminium
- Reflector optics standard 40°
- Cree CXB 95+
- Available in 3000K & 4000K colour temperature
- Quick and Easy – installation
- Dimmable – refer driver platform for options
- 50,000 Hours (L70)
- One of a family of 4 trim sizes (JAX Series 1-4), 10-54 wattage options

### Applications

- Designed for retail, food preparation, facades

### Specifications

Colour Temp	3000K and 4000K
Lumen Output	See Chart
CRI	>95
Macadams Step	3 SDCM
Beam Distribution	Symmetric
Default Beam Angle	40°
Lumen Maintenance	L70 50,000hrs
Control	Remote
Dimensions	Ø180 x H:178mm
Cut Out	Ø168mm
Min Recessed Depth	208mm
Power Factor	0.9
Electrical Rating	Class III


# JAX SERIES 3

## Range of LED Downlights

### Technical Requirements

35/40W	Required Component			
	Driver		35W	40W
	DAT65F14001	Non-Dim	900mA	1050mA*
	DAT55D14001	DALI		
	DAM60V14001	1-10V		
* = Factory Default				

Body selection	Description	Wattage	Lumens Initial	Lumens Exit	mA setting
JD1803101	JAX SERIES 3 40W 3K WHITE	35	3408	3232	950
		40	3762	3567	1050
JD1804101	JAX SERIES 3 40W 4K WHITE	35	3520	3339	950
		40	3886	3685	1050
JD1803102	JAX SERIES 3 40W 3K BLACK	35	3408	3232	950
		40	3762	3567	1050
JD1804102	JAX SERIES 3 40W 4K BLACK	35	3520	3339	950
		40	3886	3685	1050
JD1803103	JAX SERIES 3 40W 3K SILVER	35	3408	3232	950
		40	3762	3567	1050
JD1804103	JAX SERIES 3 40W 4K SILVER	35	3520	3339	950
		40	3886	3685	1050

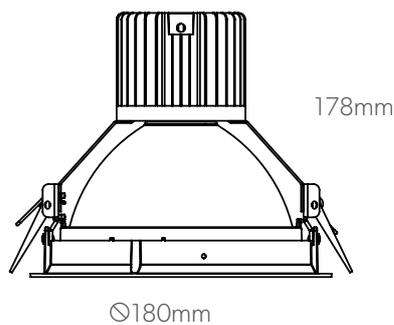

Cut out 168mm 

