


VARIOS MINOR

Modular System LED Downlight

Varios Minor Modular System is the next generation in accent down lighting. Introducing the high performance of LED with the ultimate flexibility of interchangeable components thus creating the ability to form ambiance and drama which is ideal for a diverse range of applications. Designed to be a seamless transition from traditional light sources whilst harmonising design concepts.

VARIOS MINOR

Modular System LED Downlight



Features

- Select Trim + Module(s) + Driver (1 per Module) = Complete Fitting
- Die-cast body with a drop forge heatsink
- Optics 20°/40°, variable outputs and styles.
- Range available in 2 styles and multiple combinations (single, double, triple and single round option)
- Toolless operation. Quick connect plugs
- Multiple optics (fixed head), outputs and styles
- Available in 3000K and 4000K colour temperature
- Bidirectional adjustment
- Average rated Lamp design life 50000hrs / 70%
- Dimmable - (refer to the driver platform) operates from the common driver platform
- One of a family of 8 trim sizes mount with 15/26/40 wattage options depending on driver and fixture size
- 3 year warranty

Applications

- Designed for retail fit out, commercial areas, transit corridors, break out areas, lobby's, common areas.

Specifications

	Varios 15W LG Module	Varios 15W DG Module
Colour temp	3000K and 4000K	3000K and 4000K
Lumen output	See Chart	See chart
CRI	>95	>95
Macadams step	3 SDCM	3 SDCM
Beam distribution	Symmetric	Symmetric
Default beam angle		
Lumen maintenance	L70 50,000hrs	L70 50,000hrs
Control	REMOTE	REMOTE
Dimensions (module only)	Ø74 x H:87mm	Ø74 x H:111mm
Cutout	Refer to fixture selected	Refer to fixture selected
Min recessed depth	150mm	150mm
Power factor	0.9	0.9
Electrical rating	Class III	Class III

VARIOS MINOR

Modular System LED Downlight

Driver & Module - Shallow Profile




15W	Required Component		
	Driver		15W
	DAD20F03501	Non-Dim	350mA*
	DAD20D03501	DALI	
	DAD20V035001	1-10V	
* = Factory Default			

Series	Module selection	Description	Wattage	Lumens Initial	Lumens Exit	mA setting
	VAL074335201A	VARIOS MIN 15W 3K LG 20D RF WH	15	1320	1221	350
	VAL074335401A	VARIOS MIN 15W 3K LG 40D RF WH	15	1320	1221	350
	VAL074435201A	VARIOS MIN 15W 4K LG 20D RF WH	15	1365	1263	350
	VAL074435401A	VARIOS MIN 15W 4K LG 40D RF WH	15	1365	1263	350

Module - Deep Profile

Series	Module selection	Description	Wattage	Lumens Initial	Lumens Exit	mA setting
	VAG074335201A	VARIOS MIN 15W 3K DG 20D RF WH	15	1320	1221	350
	VAG074335401A	VARIOS MIN 15W 3K DG 40D RF WH	15	1320	1221	350
	VAG074435201A	VARIOS MIN 15W 4K DG 20D RF WH	15	1365	1263	350
	VAG074435401A	VARIOS MIN 15W 4K DG 40D RF WH	15	1365	1263	350

Trim



Trim selection	Trim selection	Description	Cut-Out(mm)
	VAR1081	VARIOS MIN RND FRM/TRM WHITE	100
	VAS1301	VARIOS MIN X1 FRM AND TRIM WHITE	115 X 115
	VAD2371	VARIOS MIN X2 FRM AND TRIM WHITE	115 X 218
	VAT3341	VARIOS MIN X3 FRM AND TRIM WHITE	115 X 312

VARIOS MINOR

Modular System LED Downlight

Create multiple options for greater effect in all applications.

Select Trim + Module(s) + Driver (1 per Module) = Complete Fitting

Trim	Module	Driver
		
		
		
		




VARIOS MINOR

Modular System LED Downlight


Technical Requirements

Single Round

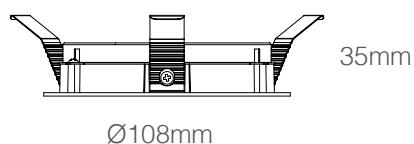


Cut out Ø100mm 

Single Square

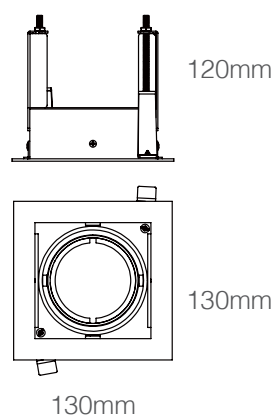


Cut out 115x115mm 

Twin

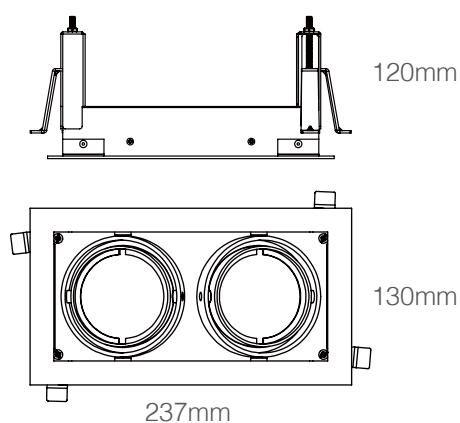


Cut out 218x115mm 

Triple

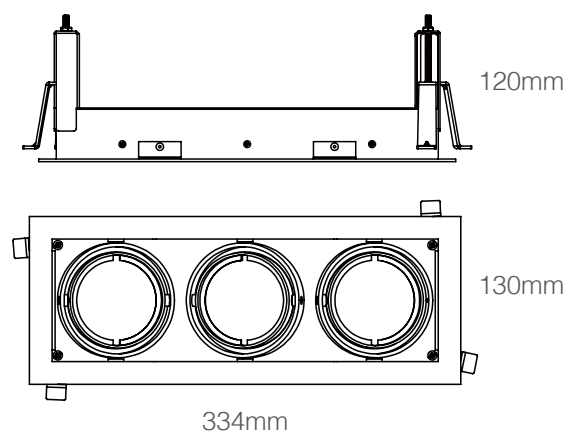


Cut out 312x115mm 

15W LG Module



15W DG Module

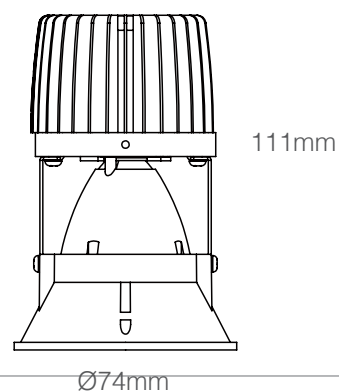

VARIOS MINOR

Modular System LED Downlight

Technical Requirements

