

# MINI MONO TONDO




- Corpo in alluminio pressofuso.
- Verniciatura in polveri con pretrattamento speciale per esterni.
- Vetro di protezione temperato.
- Anello di finitura in acciaio inox AISI 316.
- Viteria in acciaio inox.
- Gruppo di alimentazione inserito nell'apparecchio.
- Ottiche in alluminio purissimo.
- Guarnizioni e pressacavo di tenuta in gomma siliconica.



- Body and in die-cast aluminium.
- Powder coated with pretreatment for outdoor use.
- Tempered protection glass.
- AISI 316 steel finishing trim.
- Inox steel screws.
- Control gear in the body.
- Very pure aluminium optics.
- Silicon rubber gaskets and cable gland.

		LED					SISTEMA-SYSTEM		
		W	lm	V	K	CRI	W	lm	lm/W
	 MONO EMISSIONE - MONO EMISSION Br E4900-LBC-M Ne E4901-LBC-M Gr E4902-LBC-M	1x11,5W	1840	220-240V (350mA)	3000	>80	13,5W	1178	87
	 1 FASCIO STRETTO 5° - 1 NARROW BEAM 5° Br E4900-LBC-1LM Ne E4901-LBC-1LM Gr E4902-LBC-1LM	1x2,5W	125	220-240V (700mA)	3000	>80	3,5W	98	28
	 CON LENTE ELLISSOIDALE - WITH ELLIPTICAL LENS Br E4900-LBC-LM Ne E4901-LBC-LM Gr E4902-LBC-LM	1x2,5W	125	220-240V (700mA)	3000	>80	3,5W	97	28
	 Br E4900-LBN-M Ne E4901-LBN-M Gr E4902-LBN-M	1x11,5W	1950	220-240V (350mA)	4000	>80	13,5W	1261	93
	 Br E4900-LBN-1LM Ne E4901-LBN-1LM Gr E4902-LBN-1LM	1x2,5W	135	220-240V (700mA)	4000	>80	3,5W	106	30
	 Br E4900-LBN-LM Ne E4901-LBN-LM Gr E4902-LBN-LM	1x2,5W	175	220-240V (700mA)	4000	>80	3,5W	135	30
	 Br E4900-LBI-LM Ne E4901-LBI-LM Gr E4902-LBI-LM	1x2,5W	195	220-240V (700mA)	6000	>80	3,5W	151	42

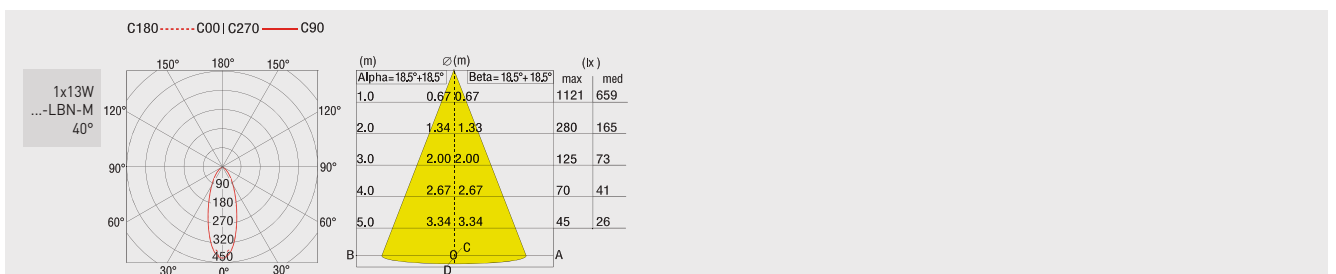




# MINI DOUBLE TONDO

- Corpo in alluminio pressofuso.
- Verniciatura in polveri con pretrattamento speciale per esterni.
- Vetro di protezione temperato.
- Anello di finitura in acciaio inox AISI 316.
- Viteria in acciaio inox.
- Gruppo di alimentazione inserito nell'apparecchio.
- Ottiche in alluminio purissimo.
- Guarnizioni e pressacavo di tenuta in gomma siliconica.

- Body and in die-cast aluminium.
- Powder coated with pretreatment for outdoor use.
- Tempered protection glass.
- AISI 316 steel finishing trim.
- Inox steel screws.
- Control gear in the body.
- Very pure aluminium optics.
- Silicon rubber gaskets and cable gland.



	LED					SISTEMA-SYSTEM			
	W	lm	V	K	CRI	W	lm	lm/W	
 1 FASCIO STRETTO 5° - 1 NARROW BEAM 5° Br E4900-LBC-1L Ne E4901-LBC-1L Gr E4902-LBC-1L	11,5+1,2W	1840/80	220-240V (350mA)	3000	>80	14,7W	1368	93	
	 2 FASCI STRETTI 5° - 2 NARROW BEAMS 5° Br E4905-LBN-1L Ne E4901-LBN-1L Gr E4902-LBN-1L	11,5+1,2W	1950/85	220-240V (350mA)	4000	>80	14,7W	1450	99
		2x2,5W	2x125	220-240V (700mA)	3000	>80	6W	194	32
 2 FASCI STRETTI 5° - 2 NARROW BEAMS 5° Br E4905-LBN-2L Ne E4906-LBN-2L Gr E4907-LBN-2L	2x2,5W	2x135	220-240V (700mA)	4000	>80	6W	210	35	
	 CON LENTE ELLISSOIDALE - WITH ELLIPTICAL LENS Br E4900-LBC-2L Ne E4901-LBC-2L Gr E4902-LBC-2L	2x2,5W	2x125	220-240V (700mA)	3000	>80	6W	197	53
		 CON LENTE ELLISSOIDALE - WITH ELLIPTICAL LENS Br E4900-LBN-2L Ne E4901-LBN-2L Gr E4902-LBN-2L	2x2,5W	2x175	220-240V (700mA)	4000	>80	6W	277
 CON LENTE ELLISSOIDALE - WITH ELLIPTICAL LENS Br E4900-LBI-2L Ne E4901-LBI-2L Gr E4902-LBI-2L			2x2,5W	2x195	220-240V (700mA)	6000	>80	6W	309
 DOPPIA EMISSIONE - DOUBLE EMISSION Br E4900-LBC Ne E4901-LBC Gr E4902-LBC	2x11,5W	2x1840	220-240V (350mA)	3000	>80	25W	2311	92	
	 DOPPIA EMISSIONE - DOUBLE EMISSION Br E4900-LBN Ne E4901-LBN Gr E4902-LBN	2x11,5W	2x1950	220-240V (350mA)	4000	>80	25W	2490	99




IP 65



outside

C180 - ..... C00 | C270 - - - - C90

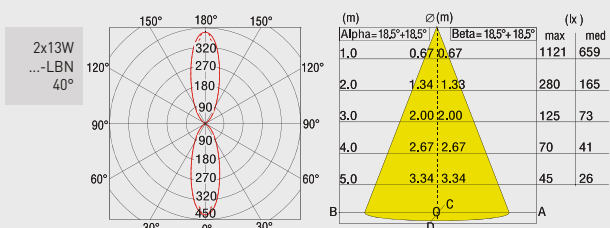

PARETE - PLAFONE - SOSPENSIONE • WALL - CEILING - SUSPENSION