



## VASO 108 AC

### *LED Track Spot Light Range*

Introducing the next generation VASO track spotlight with high performance of AC LED's. The ultimate flexibility of interchangeable reflectors enabling the ability to create an ambiance and drama which is ideal for a diverse range of applications giving the designer unlimited choice. Designed to be a seamless transition from traditional light sources whilst harmonising design concepts. Utilising the streamlined look of a driverless fixture or the ability to control the luminaire with driver options.



# VASO 108 AC

## LED Track Spot Light Range



### Features

- Die-cast body with a drop forge heatsink
- Interchangeable optics, outputs and styles 12° / 24° / 40°, standard 24°
- Citizen CL Series AC LED @ 85CRI
- Range available in 2 sizes, 4 wattages, 2 configurations 10W/20W /30W/42W (with control gear)
- Available in 3000K & 4000K colour temperature
- Bidirectional adjustment
- Lamp life 50000hrs / 70%
- Compatible with Concord 3C, Staff 3C, Eutrack 3C, Erco 3C, Global 3C, Ivela 3C, Euro Track 3C
- Dimmable using leading edge dimmer. For best performance we recommend use with Diginet LEDsmart+ Dimmers

### Applications

- Designed for retail fit out, commercial areas, transit corridors, break out areas, lobby's, common areas

### Specifications

Colour Temp	3000K and 4000K
Lumen Output	See Chart
CRI	>85
Macadams Step	3 SDCM
Beam Distribution	Symmetric
Default Beam Angle	24°
Lumen Maintenance	L70 50,000hrs
Control	AC LED
Dimensions	Ø108 x L:158 x H:175mm
Mounting	3C Universal Track Adaptor
Power Factor	0.9
Electrical Rating	Class I

### Option

Product Code	Description
VA0108RS12	VASO 108AC - 12° Reflector
VA0108RM40	VASO 108AC - 40° Reflector

### Accessories


Product Code	Description
VA0108GM1	GLARE COWL MATT WHITE
VA0108GM2	GLARE COWL MATT BLACK

# VASO 108 AC


## LED Track Spot Light Range

### Technical Requirements

Body Selection	Description	Colour Temp	mA Factory Default Setting	Lumens Initial	Lumens Exit	Wattage	CRI	Life / L70	Track Compatability
VA1083AC130	VASO108 30W L3 3K 24d RF WHITE	3000K	AC	2895	2736	30	>85	50,000	Concord 3C Staff 3C Erco 3C Nordic 3C Eutrack 3C Global 3C Ivela 3C
VA1083AC230	VASO108 30W L3 3K 24d RF BLACK	3000K	AC	2895	2736	30	>85	50,000	
VA1083AC330	VASO108 30W L3 3K 24d RF SILVER	3000K	AC	2895	2736	30	>85	50,000	



∅108mm

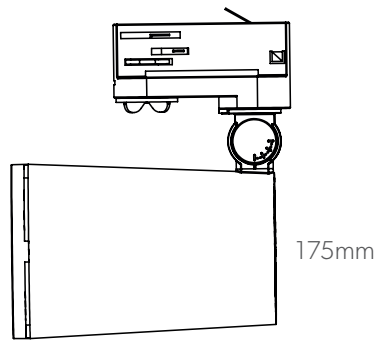

158mm

